


Solutions for Laminates

- Internal Release
- Flow Enhancement
- Wetting Agents
- Anti-Blockers
- Moisture Blockers
- Mar and Stain Resistance
- Platen Release

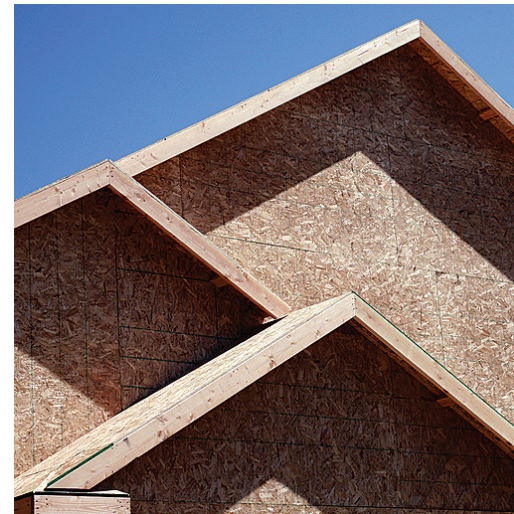

Internal Releases

	Product No.	Resin	Comments	PH (avg.)	Actives (avg.)
Release/ Wetting/ Flow Enhancers	INT-1E-11S	Melamine, Urea	Ready to use	9.0	12.5%
	INT-4E-11CC	Melamine, Urea	Concentrate	9.5	47%
	INT-XPB	Phenolic, Melamine, Urea, Latex	Emulsion for water-based resin systems	8.6-9.2	100%
	INT-EPH19	Melamine, Urea, Phenolic	For use in amine neutralized & PUD. Enhanced antifreeze properties. Can be used directly or diluted in water.	8.5	65%
	INT-2E-ATS	Melamine, Urea, Phenolic (aqueous)	Multifunctional; enhances scratch/mar/stain release, provides release	10.0	19%
	INT-1312MS	Phenolic	Methanol - low water tolerant resin systems	8.0	100%
	INT-2424	Phenolic	Water/alcohol resin systems	N/A	100%
Anti-Blockers	AB-6	Phenolic, Melamine, Urea	Contains fluoropolymer	9.3	6%
	AB-25FG	Phenolic, Melamine, Urea	Multifunctional: also blocks moisture	9.7	14%

External / Platen Releases

	Product No.	Typical Applications/Comments	Actives (avg.)
External Release Agents (100% water-based)	AMP-50	Clean, non-contaminating release for pulp and wood pressing operations. Easily diluted.	50%
	EM-1212SF2	Fluoropolymer-based release for caul plates, etc. High solids for startup. Can be diluted.	12%
	EM-303SF2	Fluoropolymer-based release - ready to use for caul plates, etc.	3%
	985JB	Water-based concentrate. Easily diluted.	50%
	JB5	Ready to use version of 985JB.	5%

These products reflect only a small portion of what we have to offer. Please contact us for more information. This information is supplied for technically skilled professionals working at their own risk. AXEL believes the information to be accurate, although the Company assumes no liability in the validity of the information for any specific process or application. Moreover, AXEL will assume no liability from any direct and/or consequential damages of any kind that may occur from the use or non-use of AXEL products or information supplied by the Company or its appointed representatives. ISO 9001 Registered. REACH Compliant. MoldWiz®, XTEND®, PasteWiz® and CleanWiz® are registered trademarks of Axel Plastics Research Laboratories Inc. ©2016 Axel Plastics Research Laboratories, Inc. All rights reserved.

AXEL



For technical data sheets or free samples contact:

Axel Plastics Research Laboratories, Inc.
50 Cambridge Drive
Monroe, CT 06468 USA
1-800-332-AXEL(2935) in USA & Canada
1-203-590-2000
Fax: 1-718-565-7447
www.axelplastics.com
info@axelplastics.com